



Model 1305
 Flange Mount
 (shown blades open)

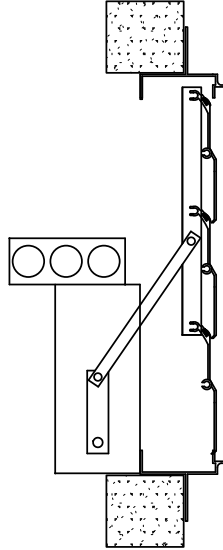

Model 1307
 Front Flange Mount
 (shown blades closed)

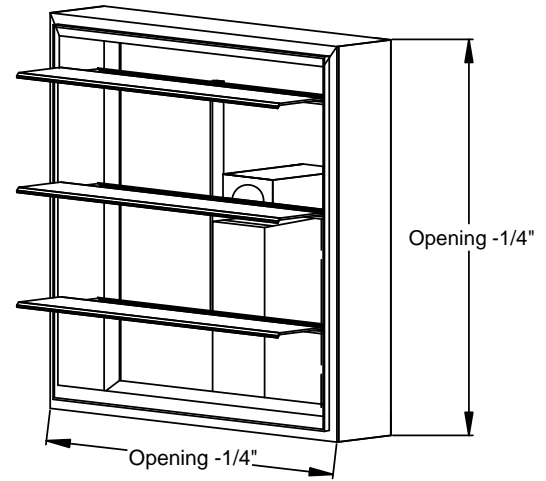

Model 1300
 Duct Mount
 (shown blades open)

Quantity	Ref. #	Width Opening Size*	Height Opening Size*	Model	Options/Accessories
PROJECT NAME:				ENGINEER:	
CONTRACTOR:				SUBMITTAL DATE:	

STANDARD CONSTRUCTION:

- Depth Blades Closed:** 2 3/4" (70 mm).
- Depth Blades Open:** 5 5/8" (143 mm).
- Frame Style:** Specify **1300** For Duct Mount Frame.
 Specify **1305** For Flange Frame.
 Specify **1307** For Front Flange Frame.
- Frame Thickness:** 0.062" 6063-T5 Extruded Aluminium.
- Blade Thickness:** 0.062" 6063-T5 Extruded Aluminium.
- Blade Centres:** 3 3/4" (95 mm).
- Minimum Height:** 8 Inches (203 mm).
- Maximum Panel Width:** Single panel 40" (1016 mm).
 Double Panel 60" (1524 mm).
- Standard Finish:** Mill.
- Standard Operation:** Power Open/Spring Return Close.
- Standard Seals:** Vinyl Blade Seals.

AVAILABLE OPTIONS:

- Bird Screen:** 1/2 x 1/2 Galvanized Bird Screen.
 1/2 x 1/2 Aluminum Bird Screen.
- Insect Screen:** Aluminum, 18 x 14 Mesh.
- Conduit hole.**
- Jackshaft** to operate multiple sections with a single actuator.
- Optional Actuator:** Belimo actuators available.
 Contact Ventex for selection.
- End switch** (available on Belimo actuators).

*Models **1300** AND **1307**: Dampers will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.
 Model **1305**: Dampers will be manufactured to the exact size ordered.