


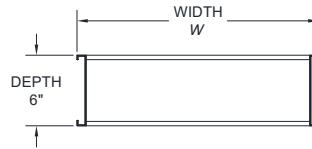


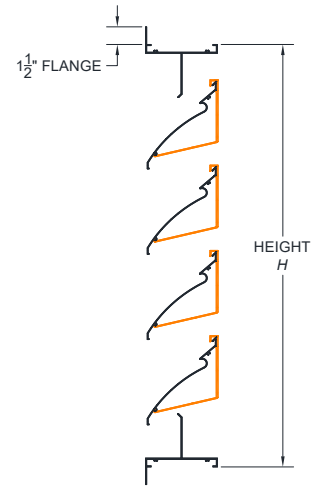

**MODEL: 2620**  
**FRAME: CHANNEL FRAME**  
**DUCT-MOUNT (DM)**

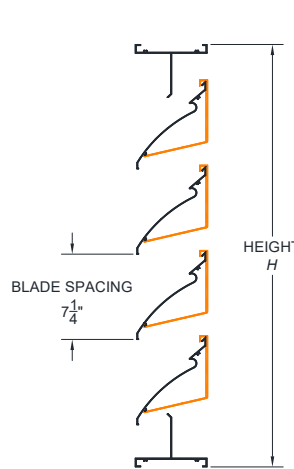

**MODEL: 2625**  
**FRAME: FLANGE FRAME**  
**FLANGE-MOUNT (FM)**

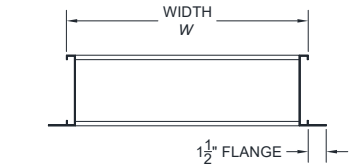

| PERFORMANCE   |                        |                        |                |
|---|------------------------|------------------------|----------------|
| LOUVER UNIT SIZE  | TOTAL AREA             | FREE AREA              | FREE AREA      |
| 48" x 48"   | 16 ft <sup>2</sup>     | 7.78 ft <sup>2</sup>   | <b>48.6%</b>   |
| (1219 x 1219 mm)  | (1.49 m <sup>2</sup> ) | (0.75 m <sup>2</sup> ) |                |
| BEGINNING POINT OF WATER PENETRATION AT 0.01 oz./ft <sup>2</sup> FREE AREA: |                        |                        | <b>588 FPM</b> |

| STANDARD CONSTRUCTION   |   |
|-------------------------|---|
| <b>DEPTH:</b>           | 6" (152 mm)   |
| <b>MATERIAL:</b>        | EXTRUDED ALUMINUM - 6063-T5 ALLOY                   |
| <b>FRAME THICKNESS:</b> | 0.080" (2.03 mm)                                    |
| <b>BLADE THICKNESS:</b> | 0.081" (2.06 mm)                                    |
| <b>BLADE ANGLE:</b>     | 45°   |
| <b>BLADE CENTRES:</b>   | 7.25" (184 mm)                                      |
| <b>BIRDSCREEN:</b>      | 19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS |
| <b>FINISH:</b>          | MILL  |

| SIZE LIMITATIONS: SINGLE SECTION LOUVER |  |   |
|---|--|---|
|   | MINIMUM                                    | MAXIMUM                                   |
| <b>WIDTH</b>                            | 6" (152.4 mm)                              | 72" (1829 mm)                             |
| <b>HEIGHT</b>                           | 16" (406 mm)                               | 120" (3048 mm)                            |
| <b>AREA</b>                             | 0.6 ft <sup>2</sup> (0.06 m <sup>2</sup> ) | 60 ft <sup>2</sup> (5.57 m <sup>2</sup> ) |

\*LOUVER WILL BE MANUFACTURED 1/4" (6.4 mm) SMALLER (SINGLE SECTION) AND 1/2" (12.7 mm) SMALLER (MULTIPLE SECTION) THAN GIVEN OPENING DIMENSIONS UNLESS OTHERWISE SPECIFIED

| AVAILABLE ACCESSORIES   |   |  |
|---|---|--|
| <b>FINISH:</b>  | <b>SCREENS:</b>   | <b>BLANK-OFF PANELS (ALUMINUM):</b> VARIOUS GAUGES   |
| <ul style="list-style-type: none"> <li>• BAKED ENAMEL FINISH</li> <li>• DURANAR FINISH</li> <li>• ANODIZED FINISH                             <ul style="list-style-type: none"> <li>○ CLEAR ANODIZED</li> <li>○ LIGHT BRONZE</li> <li>○ MEDIUM BRONZE</li> <li>○ DARK BRONZE</li> <li>○ BLACK ANODIZED</li> </ul> </li> <li>• EXTENDED SILLS</li> <li>• SECURITY BARS</li> <li>• FILTER RACKS</li> <li>• STAINLESS STEEL FASTENERS</li> <li>• HINGED ACCESS DOORS</li> <li>• ALL WELDED CONSTRUCTION</li> <li>• CUSTOM GEOMETRIC SHAPES</li> <li>• CONTINUOUS LINE CONSTRUCTION WITH HIDDEN MULLIONS TO PROVIDE AN UNINTERRUPTED APPEARANCE</li> </ul> | <ul style="list-style-type: none"> <li>• BIRDSCREEN                             <ul style="list-style-type: none"> <li>○ 1/2" x 1/2" INTER CRIMPED ALUMINUM</li> <li>○ ALUMINUM BIRDSCREEN WITH FRAME</li> </ul> </li> <li>• INSECT SCREEN                             <ul style="list-style-type: none"> <li>○ 18 x 14 MESH</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>• NON-INSULATED BLANK-OFF PANELS</li> <li>• INSULATED BLANK-OFF PANELS                             <ul style="list-style-type: none"> <li>○ 1" (25.4 mm) INSULATION</li> <li>○ 2" (50.8 mm) INSULATION</li> </ul> </li> </ul> |




**2620 / 2625**  
**6" STORMPROOF LOUVER**

**FREE AREA (Sq. Ft.)**

| HEIGHT (INCHES) | WIDTH (INCHES) |      |      |      |      |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 | 6              | 8    | 12   | 16   | 20   | 24    | 28    | 32    | 36    | 40    | 44    | 48    | 52    | 56    | 60    | 64    | 68    | 72    |
| 16              | 0.11           | 0.16 | 0.25 | 0.34 | 0.44 | 0.53  | 0.63  | 0.72  | 0.82  | 0.91  | 1.01  | 1.10  | 1.19  | 1.29  | 1.38  | 1.48  | 1.57  | 1.67  |
| 20              | 0.23           | 0.33 | 0.53 | 0.65 | 0.84 | 1.02  | 1.20  | 1.38  | 1.56  | 1.74  | 1.92  | 2.10  | 2.28  | 2.46  | 2.64  | 2.82  | 3.00  | 3.18  |
| 24              | 0.29           | 0.42 | 0.68 | 0.90 | 1.15 | 1.40  | 1.65  | 1.90  | 2.15  | 2.40  | 2.65  | 2.90  | 3.15  | 3.40  | 3.65  | 3.90  | 4.15  | 4.40  |
| 28              | 0.37           | 0.53 | 0.86 | 1.18 | 1.51 | 1.84  | 2.17  | 2.49  | 2.82  | 3.15  | 3.47  | 3.80  | 4.13  | 4.45  | 4.78  | 5.11  | 5.43  | 5.76  |
| 32              | 0.45           | 0.65 | 1.06 | 1.43 | 1.83 | 2.23  | 2.62  | 3.02  | 3.41  | 3.81  | 4.20  | 4.60  | 5.00  | 5.39  | 5.79  | 6.18  | 6.58  | 6.97  |
| 36              | 0.51           | 0.73 | 1.18 | 1.62 | 2.07 | 2.52  | 2.96  | 3.41  | 3.86  | 4.31  | 4.75  | 5.20  | 5.65  | 6.09  | 6.54  | 6.99  | 7.44  | 7.88  |
| 40              | 0.60           | 0.86 | 1.39 | 1.90 | 2.43 | 2.95  | 3.48  | 4.00  | 4.53  | 5.05  | 5.58  | 6.10  | 6.62  | 7.15  | 7.67  | 8.20  | 8.72  | 9.25  |
| 44              | 0.66           | 0.96 | 1.55 | 2.12 | 2.71 | 3.29  | 3.88  | 4.46  | 5.05  | 5.63  | 6.22  | 6.80  | 7.38  | 7.97  | 8.55  | 9.14  | 9.72  | 10.31 |
| 48              | 0.76           | 1.09 | 1.77 | 2.43 | 3.10 | 3.76  | 4.43  | 5.10  | 5.77  | 6.44  | 7.11  | 7.78  | 8.45  | 9.12  | 9.79  | 10.46 | 11.13 | 11.80 |
| 52              | 0.80           | 1.16 | 1.87 | 2.56 | 3.26 | 3.97  | 4.67  | 5.38  | 6.08  | 6.79  | 7.49  | 8.20  | 8.91  | 9.61  | 10.32 | 11.02 | 11.73 | 12.43 |
| 56              | 0.90           | 1.29 | 2.09 | 2.87 | 3.66 | 4.45  | 5.24  | 6.03  | 6.83  | 7.62  | 8.41  | 9.20  | 9.99  | 10.78 | 11.57 | 12.37 | 13.16 | 13.95 |
| 60              | 0.98           | 1.41 | 2.28 | 3.09 | 3.94 | 4.79  | 5.64  | 6.49  | 7.35  | 8.20  | 9.05  | 9.90  | 10.75 | 11.60 | 12.45 | 13.31 | 14.16 | 15.01 |
| 64              | 1.06           | 1.53 | 2.47 | 3.40 | 4.34 | 5.27  | 6.21  | 7.15  | 8.09  | 9.02  | 9.96  | 10.90 | 11.84 | 12.78 | 13.71 | 14.65 | 15.59 | 16.53 |
| 68              | 1.14           | 1.64 | 2.65 | 3.62 | 4.62 | 5.61  | 6.61  | 7.61  | 8.61  | 9.60  | 10.60 | 11.60 | 12.60 | 13.60 | 14.59 | 15.59 | 16.59 | 17.59 |
| 72              | 1.20           | 1.73 | 2.80 | 3.84 | 4.89 | 5.95  | 7.01  | 8.07  | 9.13  | 10.18 | 11.24 | 12.30 | 13.36 | 14.42 | 15.47 | 16.53 | 17.59 | 18.65 |
| 76              | 1.29           | 1.86 | 3.01 | 4.15 | 5.29 | 6.44  | 7.58  | 8.72  | 9.87  | 11.01 | 12.16 | 13.30 | 14.44 | 15.59 | 16.73 | 17.88 | 19.02 | 20.16 |
| 80              | 1.35           | 1.96 | 3.16 | 4.33 | 5.53 | 6.73  | 7.92  | 9.12  | 10.31 | 11.51 | 12.70 | 13.90 | 15.10 | 16.29 | 17.49 | 18.68 | 19.88 | 21.07 |
| 84              | 1.44           | 2.09 | 3.37 | 4.62 | 5.89 | 7.16  | 8.43  | 9.71  | 10.98 | 12.25 | 13.53 | 14.80 | 16.07 | 17.35 | 18.62 | 19.89 | 21.17 | 22.44 |
| 88              | 1.49           | 2.16 | 3.48 | 4.77 | 6.09 | 7.40  | 8.72  | 10.04 | 11.35 | 12.67 | 13.98 | 15.30 | 16.62 | 17.93 | 19.25 | 20.56 | 21.88 | 23.20 |
| 92              | 1.59           | 2.29 | 3.70 | 5.08 | 6.48 | 7.89  | 9.29  | 10.69 | 12.09 | 13.50 | 14.90 | 16.30 | 17.70 | 19.10 | 20.51 | 21.91 | 23.31 | 24.71 |
| 96              | 1.66           | 2.40 | 3.87 | 5.24 | 6.68 | 8.13  | 9.57  | 11.02 | 12.46 | 13.91 | 15.35 | 16.80 | 18.25 | 19.69 | 21.14 | 22.58 | 24.03 | 25.47 |
| 100             | 1.75           | 2.53 | 4.09 | 5.61 | 7.16 | 8.71  | 10.26 | 11.81 | 13.35 | 14.90 | 16.45 | 18.00 | 19.55 | 21.10 | 22.65 | 24.19 | 25.74 | 27.29 |
| 104             | 1.82           | 2.63 | 4.25 | 5.80 | 7.40 | 9.00  | 10.60 | 12.20 | 13.80 | 15.40 | 17.00 | 18.60 | 20.20 | 21.80 | 23.40 | 25.00 | 26.60 | 28.20 |
| 108             | 1.89           | 2.73 | 4.41 | 6.05 | 7.72 | 9.39  | 11.06 | 12.72 | 14.39 | 16.06 | 17.73 | 19.40 | 21.07 | 22.74 | 24.41 | 26.08 | 27.74 | 29.41 |
| 112             | 1.98           | 2.86 | 4.63 | 6.33 | 8.08 | 9.82  | 11.57 | 13.32 | 15.06 | 16.81 | 18.55 | 20.30 | 22.05 | 23.79 | 25.54 | 27.28 | 29.03 | 30.78 |
| 116             | 2.05           | 2.96 | 4.78 | 6.52 | 8.32 | 10.11 | 11.91 | 13.71 | 15.51 | 17.30 | 19.10 | 20.90 | 22.70 | 24.50 | 26.29 | 28.09 | 29.89 | 31.69 |
| 120             | 2.13           | 3.07 | 4.97 | 6.80 | 8.67 | 10.55 | 12.42 | 14.30 | 16.17 | 18.05 | 19.92 | 21.80 | 23.68 | 25.55 | 27.50 | 29.30 | 31.18 | 33.05 |

**WATER PENETRATION - 2620 / 2625**


15 MINUTE DURATION, TEST SIZE 48" x 48"

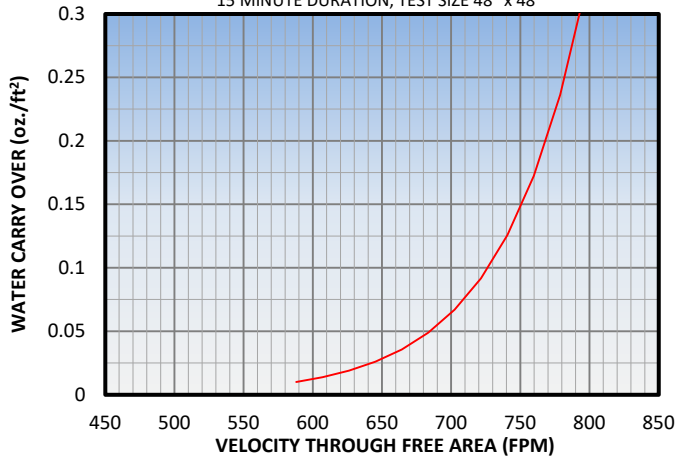

BEGINNING POINT OF WATER PENETRATION AT 0.01 oz./ft² FREE AREA IS 588 FPM

**PRESSURE DROP - 2620 / 2625**

FIGURE 5.5, TEST SIZE 48" x 48"

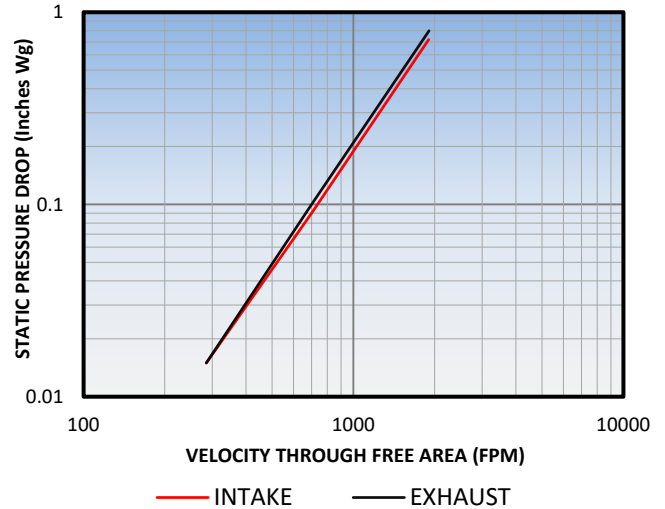

\*TEST RESULTS DO NOT INCLUDE THE EFFECTS OF BIRDSCREEN  
DATA CORRECTED TO STANDARD AIR DENSITY @ 0.075 LBS/FT³.

**RECOMMENDED SPECIFICATION**

Furnish and install stationary louver models 2620 / 2625 as manufactured by Ventex Inc, Alliston, Ontario. Louvers must be licensed to bear the AMCA seal. Louvers shall be 6" (152 mm) deep. Blades shall be 0.081" (2.06 mm) extruded 6063-T5 aluminum alloy and frame shall be 0.080" (2.03 mm) extruded 6063-T5 aluminum alloy. Louvers shall have 19 gauge galvanized 1/2" x 1/2" birdscreen. All materials shall be factory finished after assembly with Polyester Powder Coat in a color selected from the Ventex Color Chart.

**CERTIFIED RATINGS**

Ventex Inc. certifies that the models 2620 / 2625 shown here are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The Certified Ratings Seal applies to air performance and water penetration ratings.



**Certification**