


* MITRE CORNER MILL FINISH MAX SIZE 88 X 112 X 72
MITRE CORNER MAX SIZE PAINTED 52 X 112 X 66 FOR LARGER
SIZES USE MODEL-2425MS

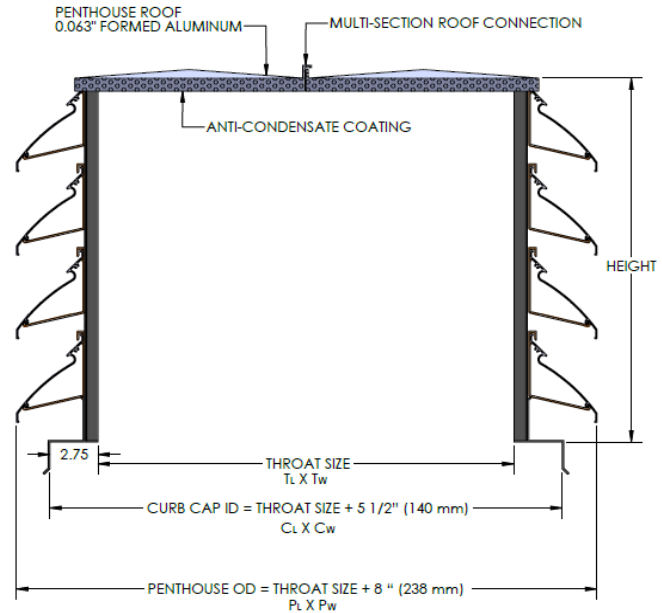


STANDARD CONSTRUCTION	
BLADE STYLE:	4" (102 mm) DEEP STORMPROOF BLADES
CORNER STYLE:	MITRE CORNER
MATERIAL:	EXTRUDED ALUMINUM – 6063-T5 ALLOY
FRAME THICKNESS:	0.090" (2.29 mm)
BLADE THICKNESS:	0.081" (2.06 mm)
BLADE ANGLE:	45°
BLADE CENTRES:	4.875" (124 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
FINISH:	MILL
ROOF INSULATION:	FACTORY APPLIED ANTI-CONDENSATE COATING

	SIZE LIMITATIONS	
	MINIMUM	MAXIMUM
THROAT T _L x T _w	12" x 12" (305 x 305 mm)	CONSULT VENTEX
CURB CAP ID C _L x C _w	17.5" x 17.5" (445 x 445 mm)	
PENTHOUSE OD P _L x P _w	21.375" x 21.375" (543 x 543 mm)	
HEIGHT	12" (305 mm)	

*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED
*RECOMMENDED CURB SIZE = CURB CAP ID – 1 1/2" (38 mm)

AVAILABLE ACCESSORIES	
SCREENS:	BLANK-OFF PANELS (ALUMINUM): VARIOUS GAUGES
<ul style="list-style-type: none"> • BIRDSCREEN <ul style="list-style-type: none"> ○ 1/2" x 1/2" INTER CRIMPED ALUMINUM ○ BIRDSCREEN WITH FRAME • INSECT SCREEN (ALUMINUM AND SS) <ul style="list-style-type: none"> ○ 18 x 14 MESH 	<ul style="list-style-type: none"> • NON-INSULATED BLANK-OFF PANELS • INSULATED BLANK-OFF PANELS <ul style="list-style-type: none"> ○ 1" (25.4 mm) INSULATION ○ 2" (50.8 mm) INSULATION
OTHER:	
<ul style="list-style-type: none"> • SECURITY BARS • FILTER RACKS • STAINLESS STEEL FASTENERS • HINGED ROOF • ALL WELDED CONSTRUCTION • 3MM HEAVY DUTY BLADE CONSTRUCTION • CONTROL DAMPERS / BACK DRAFT DAMPERS FOR THROAT 	

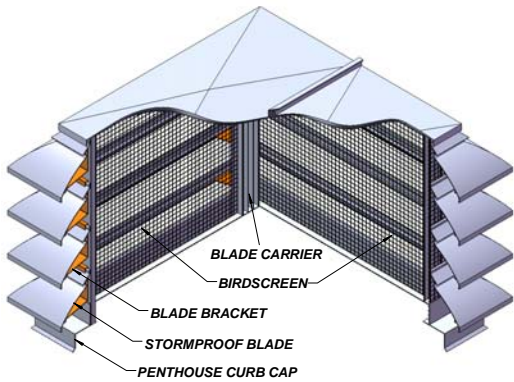

TAG	QTY.	THROAT SIZE T _L x T _w	CURB CAP ID C _L x C _w	PENTHOUSE OD P _L x P _w	HEIGHT	ACCESSORIES
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		

THROAT SIZE + 5.5" (140 mm) THROAT SIZE + 9.375" (238 mm)

PROJECT NAME: _____	ENGINEER: _____
CONTRACTOR: _____	SUBMITTAL DATE: _____