


STANDARD CONSTRUCTION	
BLADE STYLE:	4" (102 mm) DEEP DRAINABLE BLADES
CORNER STYLE:	MULLION (BOX) CORNER
MATERIAL:	EXTRUDED ALUMINUM – 6063-T5 ALLOY
FRAME THICKNESS:	0.081" (2.06 mm)
BLADE THICKNESS:	0.081" (2.06 mm)
BLADE ANGLE:	35°
BLADE CENTRES:	3.5" (89 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - ½" x ½" OPENINGS
FINISH:	MILL
ROOF INSULATION:	FACTORY APPLIED ANTI-CONDENSATE COATING

SIZE LIMITATIONS		
	MINIMUM	MAXIMUM
THROAT T _L x T _w	12" x 12" (305 x 305 mm)	CONSULT VENTEX
CURB CAP ID C _L x C _w	20" x 20" (508 x 508 mm)	
PENTHOUSE OD P _L x P _w	20.125" x 20.125" (511 x 511 mm)	
HEIGHT	12" (305 mm)	

*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED
 **RECOMMENDED CURB SIZE = CURB CAP ID – 1 ½" (38 mm)

OPTIONS / ACCESSORIES	
FINISH:	SCREENS:
<ul style="list-style-type: none"> • POWDER COAT FINISH • DURANAR FINISH • ANODIZED FINISH <ul style="list-style-type: none"> ○ CLEAR ANODIZED ○ LIGHT BRONZE ○ MEDIUM BRONZE ○ DARK BRONZE ○ BLACK ANODIZED 	<ul style="list-style-type: none"> • BIRDSCREEN <ul style="list-style-type: none"> ○ 1/2" x 1/2" INTER CRIMPED ALUMINUM ○ ALUMINUM BIRDSCREEN WITH FRAME • INSECT SCREEN <ul style="list-style-type: none"> ○ 18 x 14 MESH
OTHER:	BLANK-OFF PANELS (ALUMINUM): VARIOUS GAUGES
<ul style="list-style-type: none"> • EXTENDED SILLS • SECURITY BARS • FILTER RACKS • STAINLESS STEEL FASTENERS • HINGED ROOF • HINGED ACCESS DOORS • ALL WELDED CONSTRUCTION • CONTROL DAMPERS / BACK DRAFT DAMPERS FOR THROAT 	<ul style="list-style-type: none"> • NON-INSULATED BLANK-OFF PANELS • INSULATED BLANK-OFF PANELS <ul style="list-style-type: none"> ○ 1" (25.4 mm) INSULATION ○ 2" (50.8 mm) INSULATION

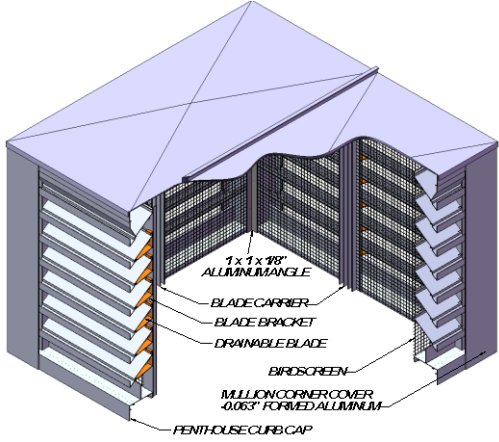

TAG	QTY.	THROAT SIZE T _L x T _w	CURB CAP ID C _L x C _w	PENTHOUSE OD P _L x P _w	HEIGHT	ACCESSORIES
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		

THROAT SIZE + 8" (203 mm) THROAT SIZE + 8.125" (206 mm)

PROJECT NAME: _____	ENGINEER: _____
CONTRACTOR: _____	SUBMITTAL DATE: _____