




PH2635B MULLION (BOX) CORNER PENTHOUSE • 6" DEEP • DRAINABLE



MULLION
CORNER

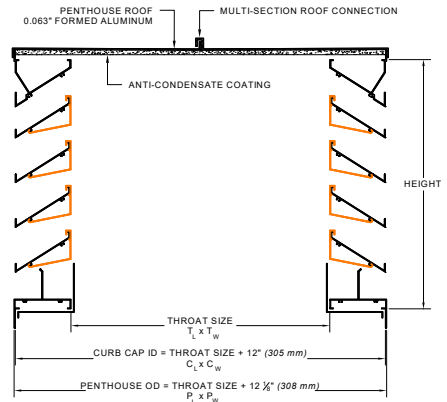

STANDARD CONSTRUCTION

BLADE STYLE:	6" (152 mm) DEEP DRAINABLE BLADES
CORNER STYLE:	MULLION (BOX) CORNER
MATERIAL:	EXTRUDED ALUMINUM – 6063-T5 ALLOY
FRAME THICKNESS:	0.095" (2.41 mm)
BLADE THICKNESS:	0.081" (2.06 mm)
BLADE ANGLE:	40°
BLADE CENTRES:	4.625" (117 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
FINISH:	MILL
ROOF INSULATION:	FACTORY APPLIED ANTI-CONDENSATE COATING

SIZE LIMITATIONS

	MINIMUM	MAXIMUM
THROAT $T_L \times T_W$	12" x 12" (305 x 305 mm)	CONSULT VENTEX
CURB CAP ID $C_L \times C_W$	24" x 24" (610 x 610 mm)	
PENTHOUSE OD $P_L \times P_W$	24.125" x 24.125" (613 x 613 mm)	
HEIGHT	16" (406 mm)	

*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED
*RECOMMENDED CURB SIZE = CURB CAP ID - 1 1/2" (38 mm)

OPTIONS / ACCESSORIES

FINISH:

- POWDER COAT FINISH
- DURANAR FINISH
- ANODIZED FINISH
 - CLEAR ANODIZED
 - LIGHT BRONZE
 - MEDIUM BRONZE
 - DARK BRONZE
 - BLACK ANODIZED

OTHER:

- EXTENDED SILLS
- SECURITY BARS
- FILTER RACKS
- STAINLESS STEEL FASTENERS
- HINGED ROOF (Single Section)
- REMOVABLE ROOF (Multi Section)
- HINGED ACCESS DOORS
- ALL WELDED CONSTRUCTION
- MONUMENTAL BLADE CONSTRUCTION (3mm Blade)
- CONTROL DAMPERS / BACK DRAFT DAMPERS FOR THROAT

SCREENS:

- BIRDSCREEN
 - 1/2" x 1/2" INTER CRIMPED ALUMINUM
 - ALUMINUM BIRDSCREEN WITH FRAME
- INSECT SCREEN
 - 18 x 14 MESH

- AIRFLOW DIVIDERS
- INSULATED ROOF
- SLOPPED ROOF
- 3-SIDED CONSTRUCTION
- BAFFLE
- DRAINPANS
- PEAK ROOFS
- NO FLANGE ON BOTTOM

BLANK-OFF PANELS (ALUMINUM): VARIOUS GAUGES

- NON-INSULATED BLANK-OFF PANELS
- INSULATED ROOF
- INSULATED BLANK-OFF PANELS
 - 1" (25.4 mm) INSULATION
 - 2" (50.8 mm) INSULATION



TAG	QTY.	THROAT SIZE $T_L \times T_W$	CURB CAP ID $C_L \times C_W$	PENTHOUSE OD $P_L \times P_W$	HEIGHT	ACCESSORIES

THROAT SIZE + 12" (305 mm) THROAT SIZE + 12.125" (308 mm)

PROJECT NAME:

CONTRACTOR:

ENGINEER:

SUBMITTAL DATE:

DWG. PH2635B DECEMBER 2024

CUSTOMIZATIONS AVAILABLE

